


Product Description

SMP-FDF-AI is the 1U FDF designed for s-eight MPO cassette. It consists of the main Fiber Distribution Frame and other related part

The FDF is suited for the scalable networking infrastructure in the data center that consist of fiber-optic cablings.

With the maximum No. of 144 fibers, the high port density satisfy the demands of space efficiency.

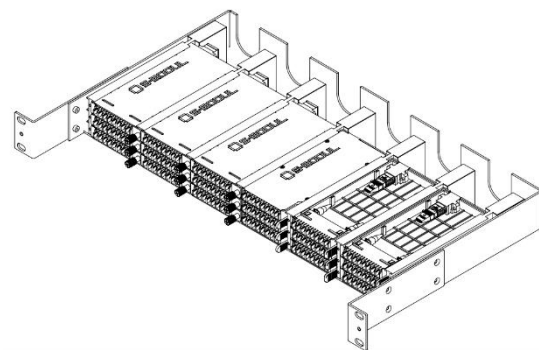

Features





- Improve and simplifies fiber routing
- Managed fiber space
- Modular Design
- 6 row & 3 story for high fiber density

Applications

- 40G to 10G or 100G to 25G interface
- Support s-eight MPO cassette
- High Density Trunk Cabling

Product Specifications

- Drawings

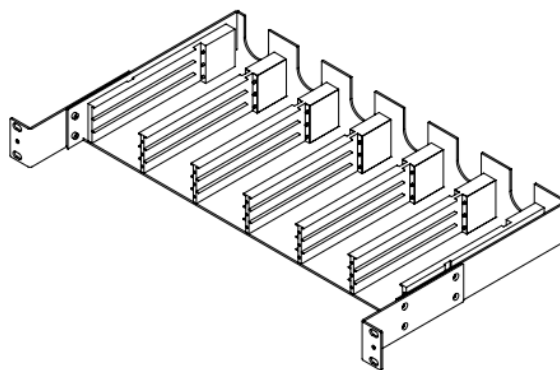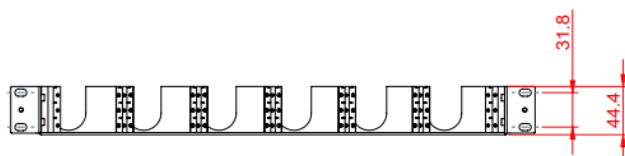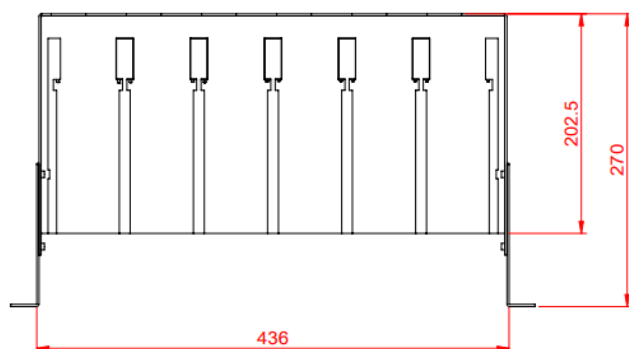

- General Information

Max Cassette No	Material	Width	Height
s-eight: 18 s-12: TBD s-24: TBD	Aluminum	19 inch	1U

SMP-FDF with 18 sets of s-eight

