

40G/100G SR BD TAP



Features

- Zero Power
- Breakout Mode
- 40G or 100G speed
- Compatible with 850nm
- Consistent with SDH, SONET and Ethernet
- All optic design
- Up to 8 Tap in 1U 19' rack
- No affect on network traffic
- No IP address needed
- Easy installation and operation
- Compatible with most NMS

✧ Specifications

Network Interface: LC Duplex connector

Monitoring Interface: LC Duplex connector

Fiber Type: 40G - OM3, 100G - OM4


Wavelength: 850nm (MMF)

Operating Temp.: 40~85°C

Humidity: 10~90% (Non condensing)




✧ Traffic Flow

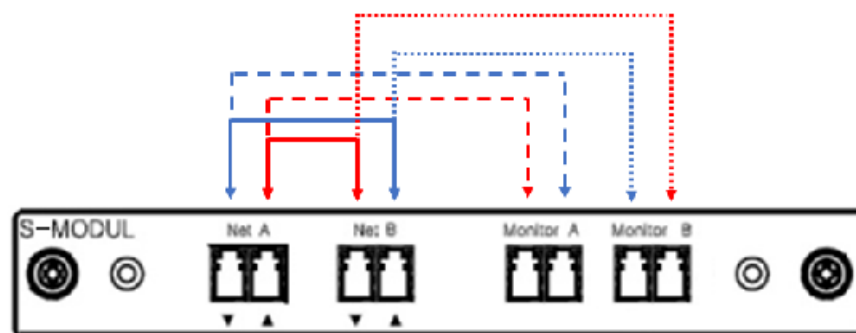

✧ Product Summary

Part No	Bandwidth & Fiber type	Split Ratio	Ch.#	Connector
STAP-40G-SR-BD	40G, OM3 50/125	50:50	1:1	LC DP
STAP-100G-SR-BD	100G, OM4 50/125		1:1	

✧ Dimension

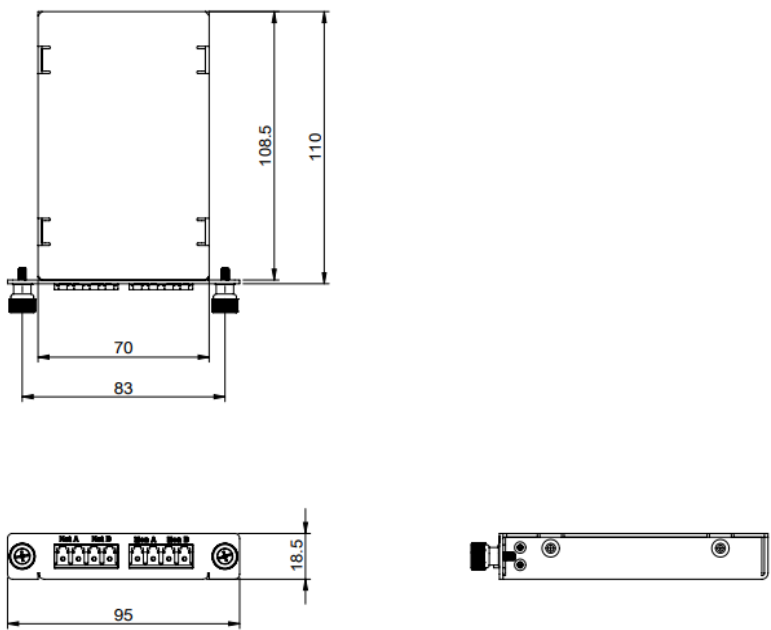

✧ Options

Part No	
S8-Guide-1U	19' 1U Universal Guide Frame

