


Product Description

SMP-FDF-AII is the 1U FDF designed for s-12 MPO cassette. It consists of the main Fiber Distribution Frame and other related parts.

The FDF is suited for the scalable networking infrastructure in the data center that consist of fiber-optic cablings.

With the maximum No. of 144 fibers, the high port density satisfy the demands of space efficiency.

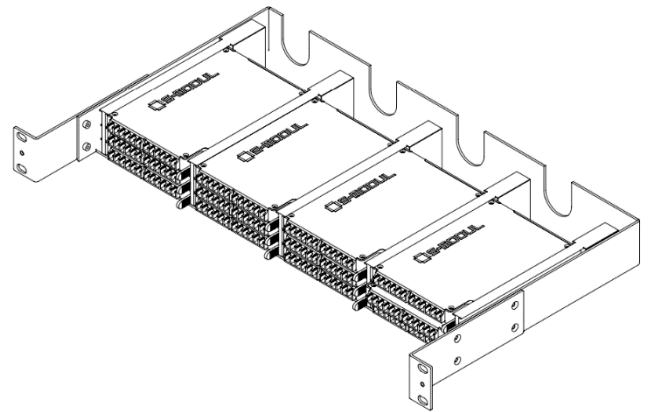

Features



- Improve and simplifies fiber routing
- Managed fiber space
- Modular Design
- 4 row & 3 story for high fiber density

Applications

- Base-12 40G to 10G or 100G to 25G interface
- Support s-12 MPO cassette
- High Density Trunk Cabling

Product Specifications

- Drawings

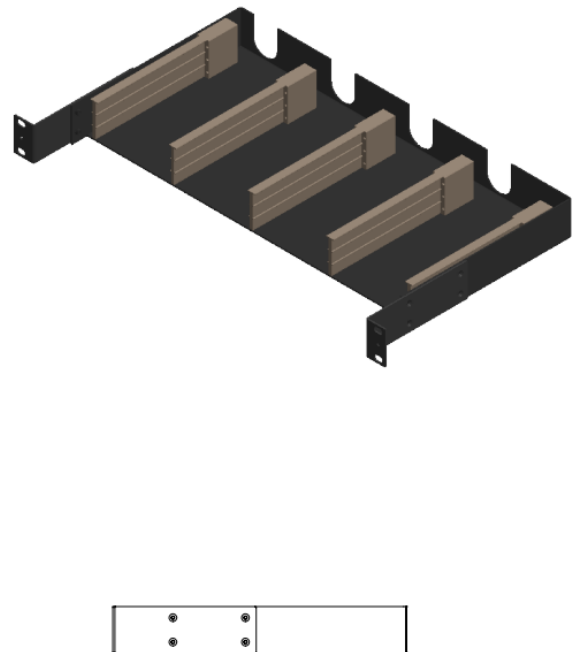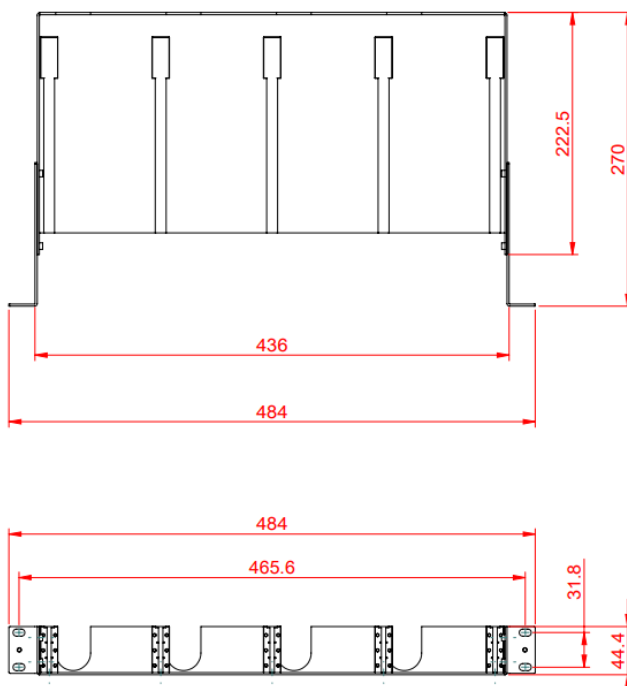

- General Information

Max Cassette No	Material	Width	Height
s-12: 12	Aluminum	19 Inch	1U

SMP-FDF-AII with 12 sets of s-12

